


# PANEL CURTAINS PANTRIC

SYSTEMS | PANEL CURTAINS | PANTRIC

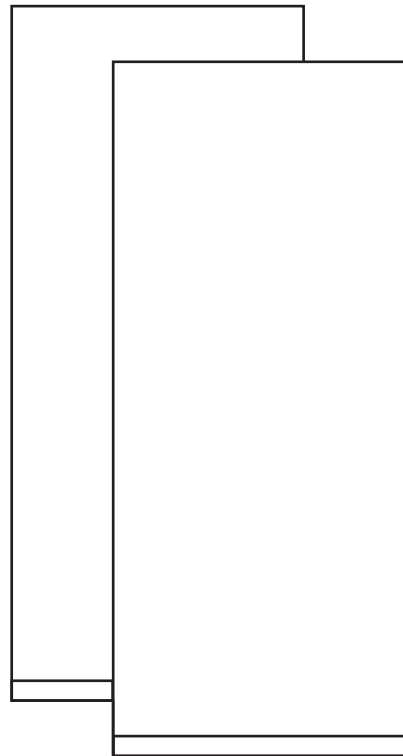

*création* **baumann**

# PANEL CURTAINS PANTRIC

A contemporary system in several different variations and offering several different design possibilities, e.g. for use as window curtains, wall paneling or partitions. Panel curtains are unparalleled in expressing the complete beauty of fabrics.

Thanks to our in-house production, we are able to offer our customers an extensive range of decorative fabrics in a myriad of plain colours, different weaving structures, designs, and innovative variants.

---

## PANTRIC 2

Page 5



---

## PANTRIC 3

Page 7



---

## PANTRIC 4

Page 9



---

## PANTRIC 5

Page 11



---

## PANTRIC POWER 24 V

Page 13

---

## ACCESSORIES

Page 15

---

## FUNCTIONS

Page 17





---

## MEASURING AND INSTALLATION

Page 19

---








# OVERVIEW PANEL CURTAINS PANTRIC

Article	Operation				Application			Measure of profile in mm	Glider channel	Options			Installation		Measures of system	
	Hand	Whirling rod	Cord	Motor	free	connect	asymmetrical			Velcro	Roller	Glider	Ceiling	Wall	Max. width cm	Max. height cm
PANTRIC 2	■				■		■		5.4 mm	■	■	■	■	■	*	300
		■			■	■	■			■	■	■	■	■	*	300
			■			■				■	■	■	■	■	600	300
PANTRIC 3	■				■		■		5.4 mm	■	■	■	■	■	*	300
		■			■	■	■			■	■	■	■	*	300	
			■			■				■	■	■	■	600	300	
PANTRIC 4	■				■		■		5.4 mm	■	■	■	■	■	*	300
		■			■	■	■			■	■	■	■	*	300	
			■			■				■	■	■	■	600	300	
				■		■				■	■	■	■	600	300	
PANTRIC 5	■				■		■		5.4 mm	■	■	■	■	■	*	300
		■			■	■	■			■	■	■	■	*	300	
			■			■				■	■	■	■	600	300	
				■		■				■	■	■	■	600	300	

\* Length after requirement, depending on operation and weight of the fabric.



# PANTRIC 2 TECHNIQUE

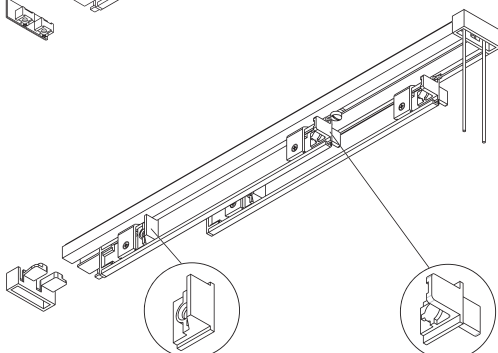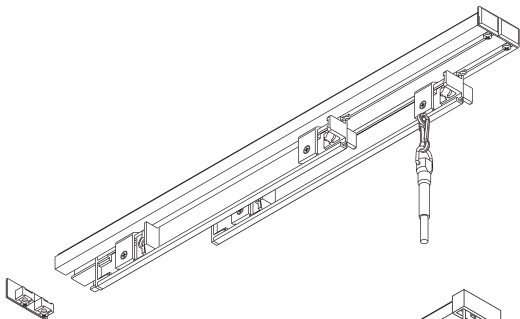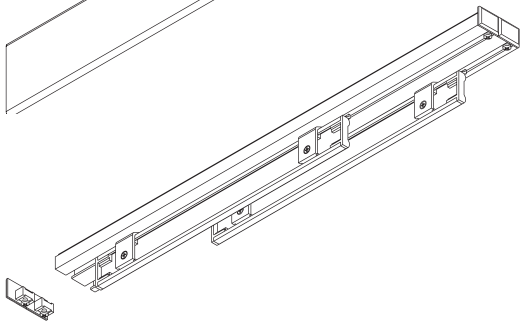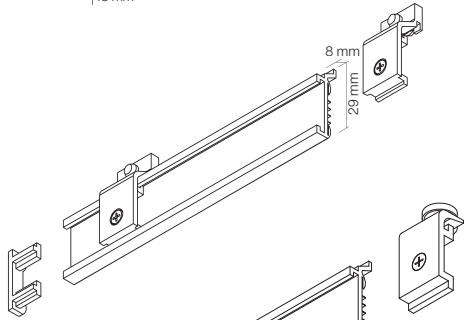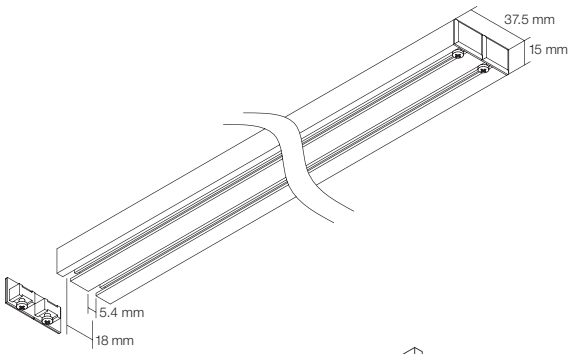

**Track** Extruded aluminium, two barrels with adjacent draw cord channel

**Colours** Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry

**Size of system** Width up to approx. 600 cm  
Height up to approx. 300 cm

**Sliding element** Extruded aluminium,  
Velcro stripe pressed into aluminium  
With runner

With round-head glider to insert at a later stage to the Pantrac track or curtain track with opening. Suitable for channels of approx. 5,5–6,5 mm

**Colours** Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry



**Weighting** Extruded aluminium

**Operation** Panels, variably and individually movable by hand


**Operation** Panels, variably movable by rod – either individually or in groups

**Operation** Panels, movable by draw cord – in groups


# PANTRIC 2 INSTALLATION



**Tension jack** Ceiling fixation with tension jack for PANTRIC 2 and 3

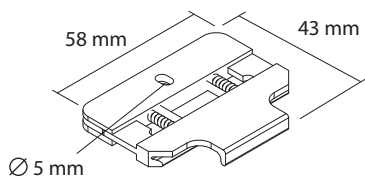


**Clip** Easy and quick ceiling fixation with plastic clip for Pantric 2 and 3




**Universal brackets** Wall fixation with aluminium brackets, cutting to size on site possible

**Colours** Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry



**Measurements**

Length	Height
approx. 130–150 mm	approx. 55 mm
approx. 180–200 mm	approx. 55 mm
approx. 230–250 mm	approx. 55 mm




**Wall support** Fixing to wall with galvanized metal support


**Colours** Standard galvanized grey  
Standard white RAL 9016  
Other colours upon inquiry

**Measurements**

Length	Height
approx. 50 mm	approx. 60 mm
approx. 80 mm	approx. 80 mm
approx. 100 mm	approx. 80 mm
approx. 120 mm	approx. 80 mm
approx. 150 mm	approx. 80 mm
approx. 180 mm	approx. 100 mm










**Profile connector** with clamping function for track PANTRIC 2 and 3



**Corner connector 90°** with clamping function for 90° mitring to track PANTRIC 2 and 3

# PANTRIC 3 TECHNIQUE

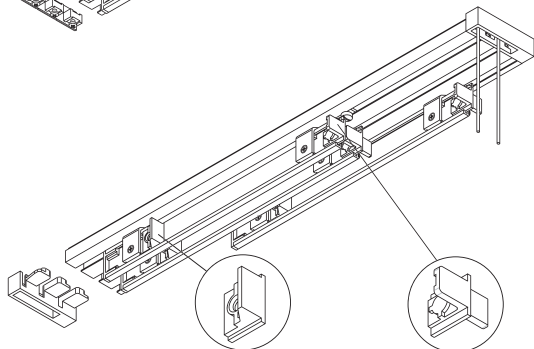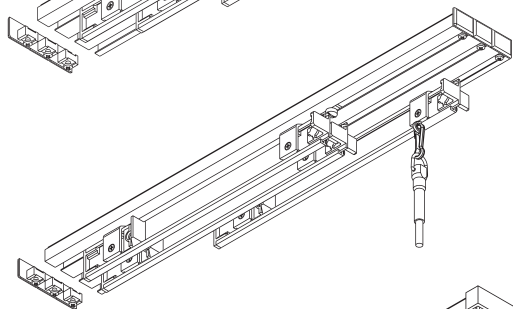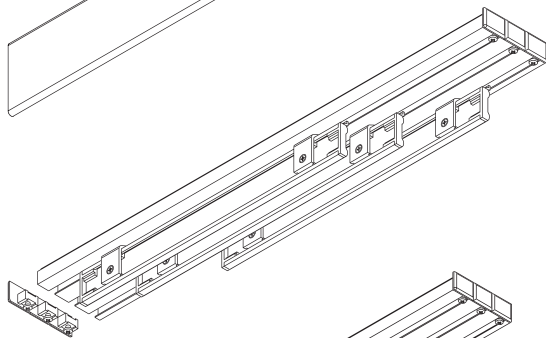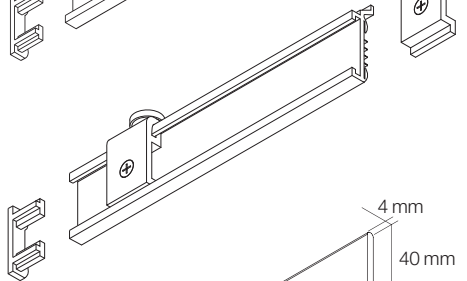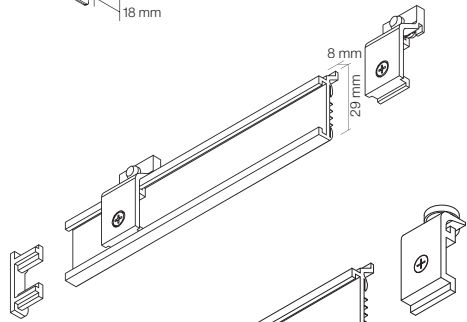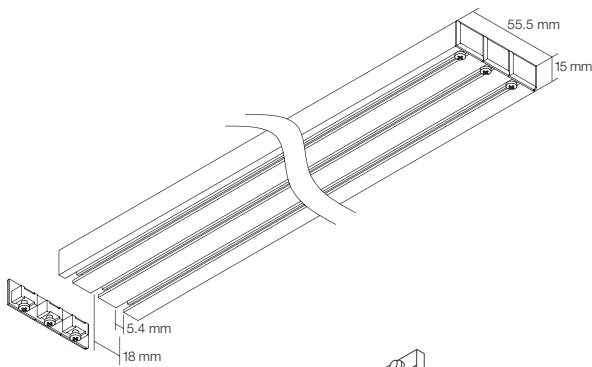

**Track** Extruded aluminium, three barrels with adjacent draw cord channel

**Colours** Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry

**Size of system** Width up to approx. 600 cm  
Height up to approx. 300 cm

**Sliding element** Extruded aluminium,  
Velcro stripe pressed into aluminium  
With runner

With round-head glider to insert at a later stage to the Pantric track or curtain track with opening. Suitable for channels of approx. 5,5–6,5 mm

**Colours** Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry



**Weighting** Extruded aluminium

**Operation** variably and individually movable by hand

**Operation** whirling rod Panels, variably movable by rod – either individually or in groups


**Operation** draw cord Panels, movable by draw cord – in groups

# PANTRIC 3 INSTALLATION




**Tension jack** Ceiling fixation with tension jack for PANTRIC 2 and 3

**Clip** Easy and quick ceiling fixation with plastic clip for Pantric 2 and 3

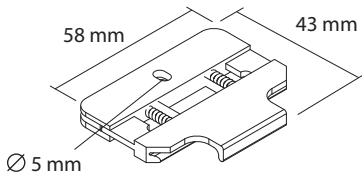


**Universal brackets** Wall fixation with aluminium brackets, cutting to size on site possible

**Colours** Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry

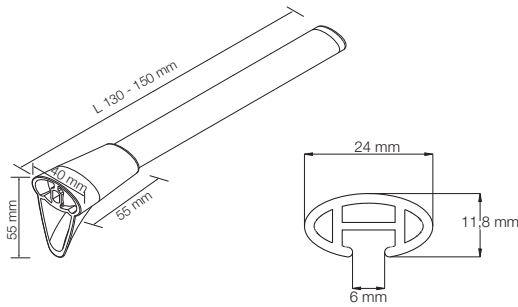

**Measurements**

Length	Height
approx. 130–150 mm	approx. 55 mm
approx. 180–200 mm	approx. 55 mm
approx. 230–250 mm	approx. 55 mm




**Wall support** Fixing to wall with galvanized metal support


**Colours** Standard galvanized grey  
Standard white RAL 9016  
Other colours upon inquiry

**Measurements**

Length	Height
approx. 50 mm	approx. 60 mm
approx. 80 mm	approx. 80 mm
approx. 100 mm	approx. 80 mm
approx. 120 mm	approx. 80 mm
approx. 150 mm	approx. 80 mm
approx. 180 mm	approx. 100 mm





**Profile connector** with clamping function for track PANTRIC 2 and 3



**Corner connector 90°** with clamping function for 90° mitreing to track PANTRIC 2 and 3



# PANTRIC 4 TECHNIQUE

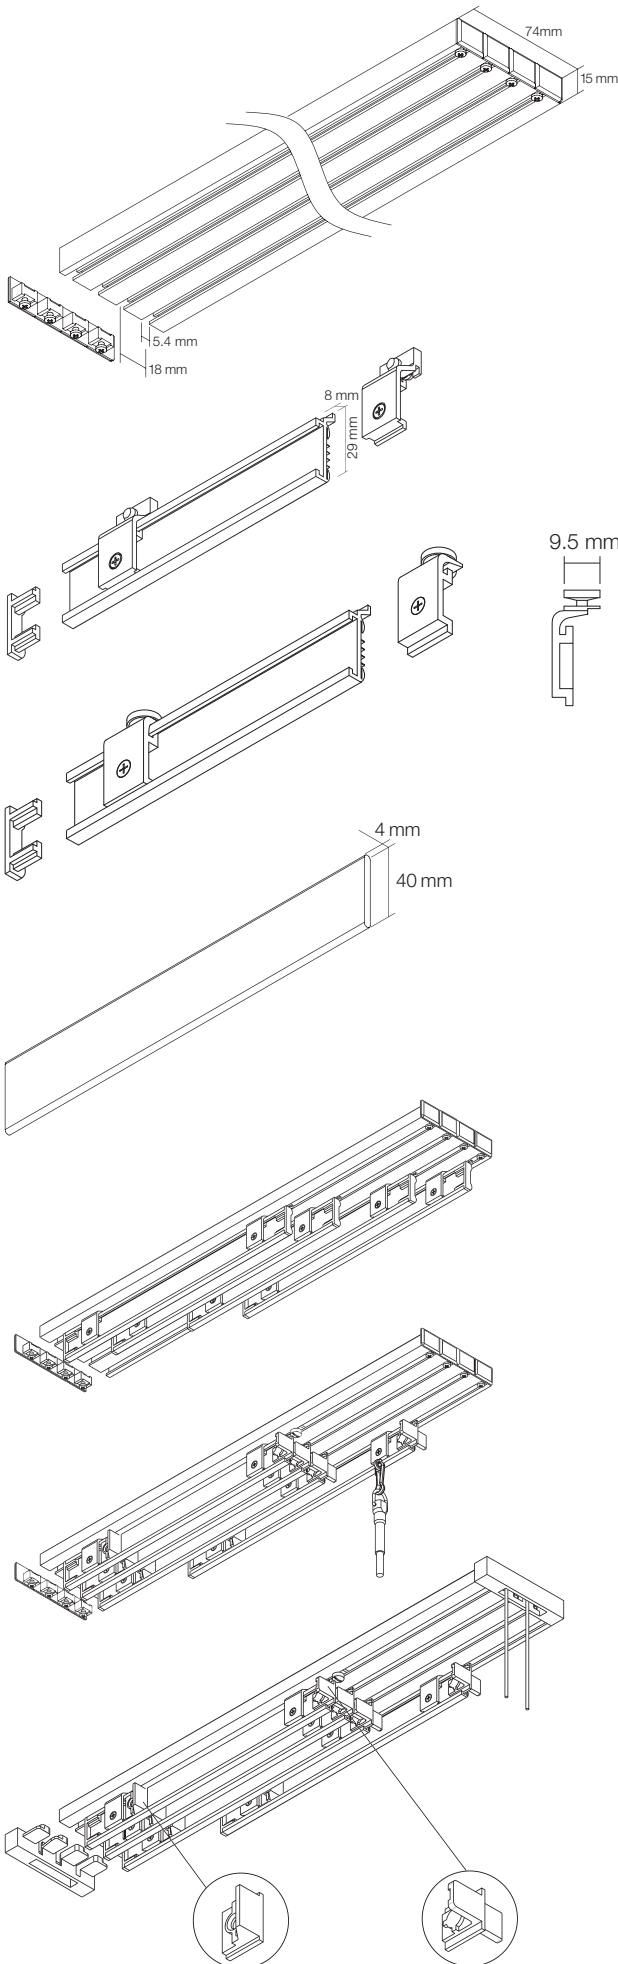

**Track** Extruded aluminium, four barrels with adjacent draw cord channel

**Colours** Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry

**Size of system** Width up to approx. 600 cm  
Height up to approx. 300 cm

**Sliding element** Extruded aluminium,  
Velcro stripe pressed into aluminium  
With runner

With round-head glider to insert at a later stage to the Pantric track or curtain track with opening. Suitable for channels of approx. 5,5–6,5 mm

**Colours** Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry



**Weighting** Extruded aluminium

**Operation** Panels, variably and individually movable by hand


**Operation** Panels, variably movable by rod – either individually or in groups

**Operation** Panels, movable by draw cord – in groups


# PANTRIC 4 INSTALLATION



**Tension jack** Ceiling fixation with tension jack for PANTRIC 4 and 5

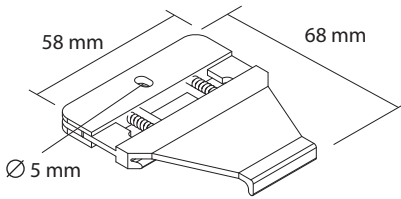

**Clip** Easy and quick ceiling fixation with plastic clip for Pantric 4 and 5

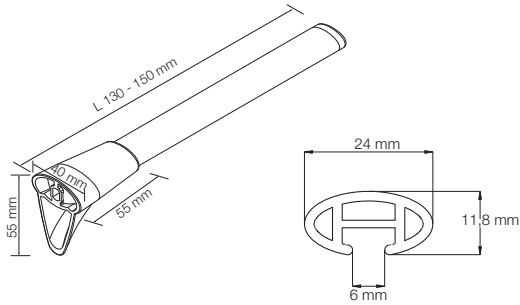


**Universal brackets** Wall fixation with aluminium brackets, cutting to size on site possible

**Colours** Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry

**Measurements**

Length	Height
approx. 130–150 mm	approx. 55 mm
approx. 180–200 mm	approx. 55 mm
approx. 230–250 mm	approx. 55 mm




**Wall support** Fixing to wall with galvanized metal support


**Colours** Standard galvanized grey  
Standard white RAL 9016  
Other colours upon inquiry

**Measurements**

Length	Height
approx. 50 mm	approx. 60 mm
approx. 80 mm	approx. 80 mm
approx. 100 mm	approx. 80 mm
approx. 120 mm	approx. 80 mm
approx. 150 mm	approx. 80 mm
approx. 180 mm	approx. 100 mm





**Profile connector** with clamping function for track PANTRIC 4 and 5



**Corner connector 90°** with clamping function for 90° mitring to track PANTRIC 4 and 5

# PANTRIC 5 TECHNIQUE

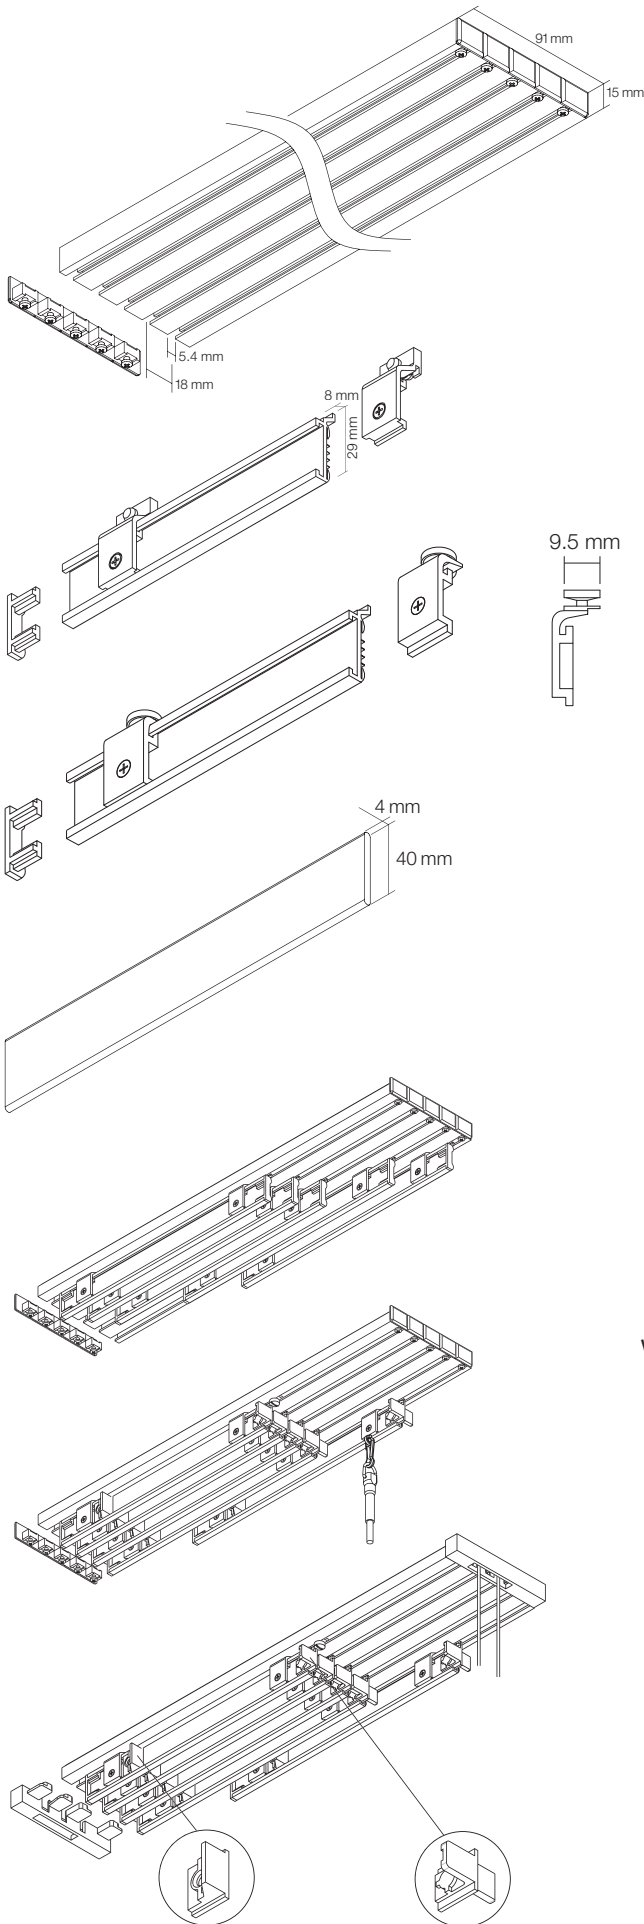

**Track** Extruded aluminium, five barrels with adjacent draw cord channel

**Colours** Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry

**Size of system** Width up to approx. 600 cm  
Height up to approx. 300 cm

**Sliding element** Extruded aluminium,  
Velcro stripe pressed into aluminium  
With runner

With round-head glider to insert at a later stage to the Pantric track or curtain track with opening. Suitable for channels of approx. 5,5–6,5 mm

**Colours** Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry



**Weighting** Extruded aluminium

**Operation** variably and individually movable by hand


**Operation** whirling rod Panels, variably movable by rod – either individually or in groups

**Operation** draw cord Panels, movable by draw cord – in groups


# PANTRIC 5 INSTALLATION



**Tension jack** Ceiling fixation with tension jack for PANTRIC 4 and 5

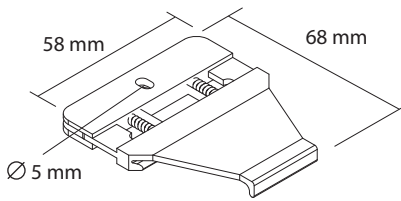

**Clip** Easy and quick ceiling fixation with plastic clip for Pantric 4 and 5

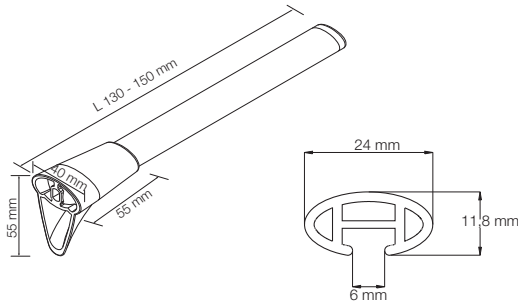


**Universal brackets** Wall fixation with aluminium brackets, cutting to size on site possible

**Colours** Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry

**Measurements**

Length	Height
approx. 130–150 mm	approx. 55 mm
approx. 180–200 mm	approx. 55 mm
approx. 230–250 mm	approx. 55 mm




**Wall support** Fixing to wall with galvanized metal support


**Colours** Standard galvanized grey  
Standard white RAL 9016  
Other colours upon inquiry

**Measurements**

Length	Height
approx. 50 mm	approx. 60 mm
approx. 80 mm	approx. 80 mm
approx. 100 mm	approx. 80 mm
approx. 120 mm	approx. 80 mm
approx. 150 mm	approx. 80 mm
approx. 180 mm	approx. 100 mm




**Profile connector** with clamping function for track PANTRIC 4 and 5



**Corner connector 90°** with clamping function for 90° mitreing to track PANTRIC 4 and 5

# PANTRIC POWER 24 V TECHNIQUE

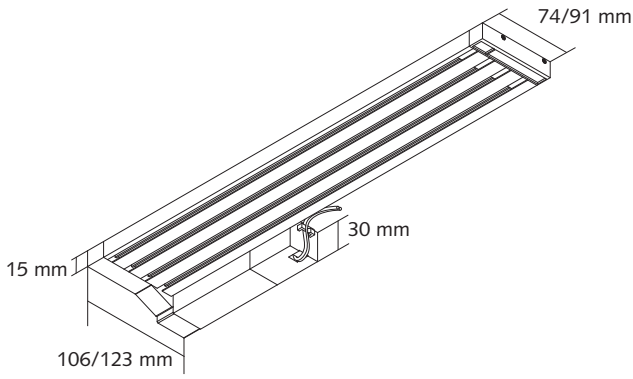

Electrical traction

Use for upper rail PANTRIC 4 and 5, assembled, a chain sets the sliding elements in motion, end position set at the works

Right or left option for positioning drive behind the track

Colours

Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry

Size of system


Width up to approx. 600 cm  
Height up to approx. 300 cm

Sliding element

Extruded aluminium,  
Velcro stripe pressed into aluminium  
With round head glider

Colours

Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry

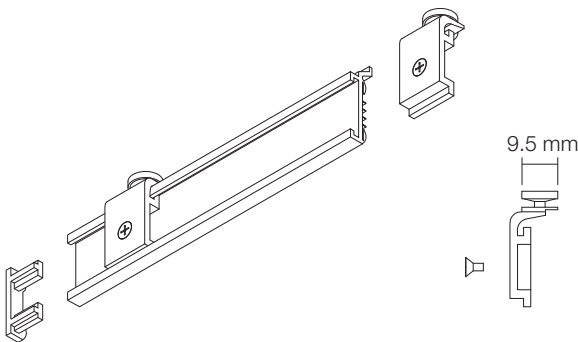


Weighting

Extruded aluminium

Motor

24 volt DC motor, noise reduced,  
height 30 mm, integrated mechanical limit

Voltage 24 Volts DC  
Rated current 300 mA  
Max. weight load 15 kg total  
Speed abt. 4 rm/min.  
Temperatur -10° C up to +60° C

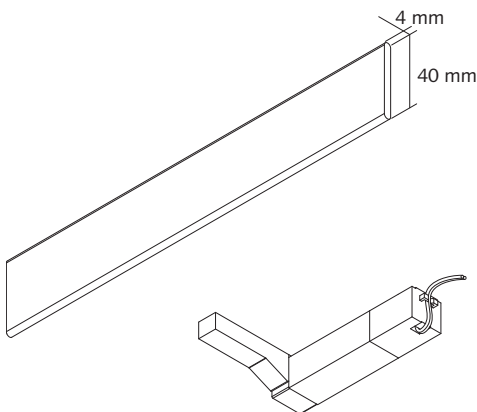


Colours motor


Standard white RAL 9016

Operation

Panels movable in groups

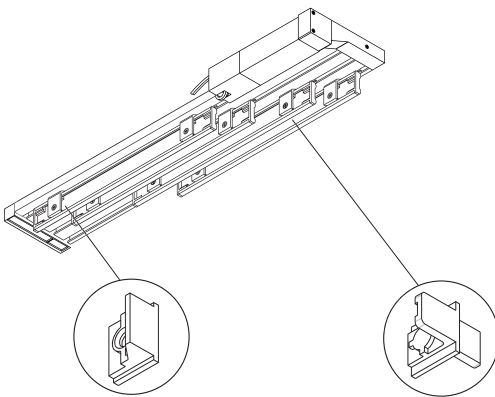


# PANTRIC POWER 24 V ⚡ TECHNIQUE

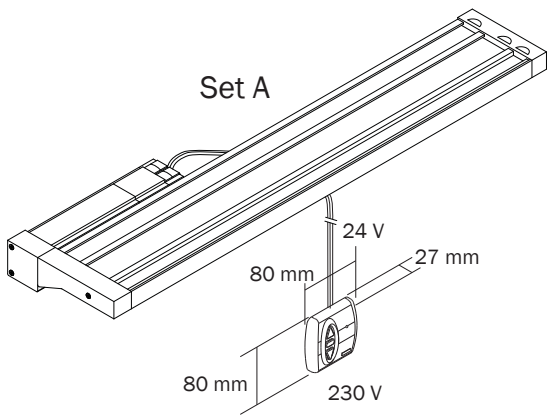


Operation/  
contoller

Set A: Switch with integrated trans-  
former (INIS DC) 230/24 volt,  
colour white

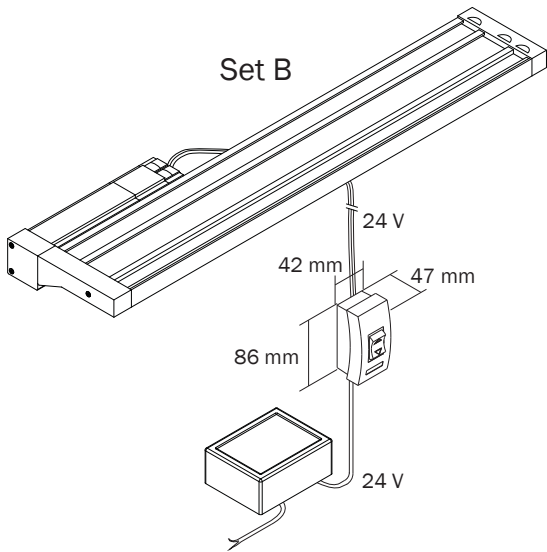

Set B: White pole reverser switch  
230/24 volt transformer with  
230 volt cable/connector as  
well as 24 volt cable

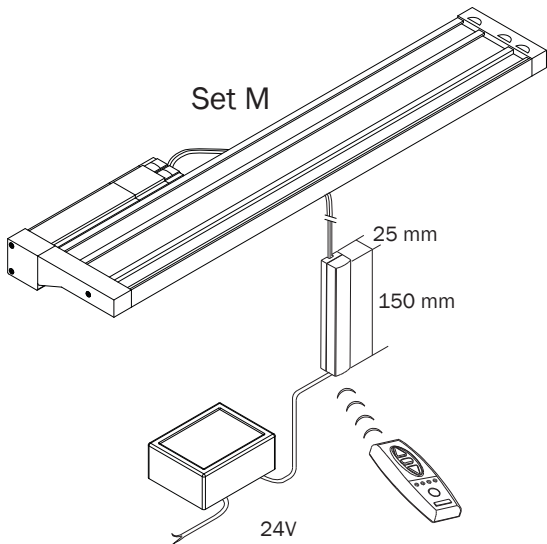


Set M: Radio receiver set (DC-RTS)  
24 volt white version with  
1-channel white radio hand-  
held transmitter (Telis 1 RTS)  
and 230/24 volt transformer  
with 230 volt cable/connector  
as well as 24 volt cable

Group control

Group control as of two installations  
upon inquiry

# ACCESSORIES



Aluminium whirling rod Aluminium, round rod  
10 mm diameter, with ring pin

Colours Standard anodized aluminium  
Standard white RAL 9016  
Other colours upon inquiry


Lengths 75 cm  
100 cm  
125 cm  
150 cm



Steel whirling rod Steel, sheathed in plastic,  
5 mm diameter, with trigger snap


Colours Standard white RAL 9016

Lengths 75 cm  
100 cm  
125 cm  
150 cm  
200 cm

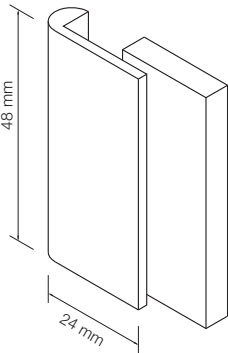

Grip RE Grip element, aluminium, two parts  
with magnet


Colour Anodized aluminium

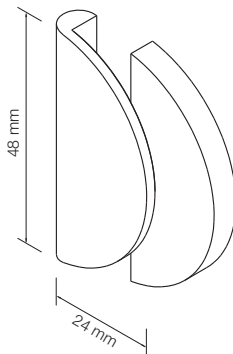

Grip SE Grip element, aluminium, two parts  
with magnet

Colour Anodized aluminium


# ACCESSORIES

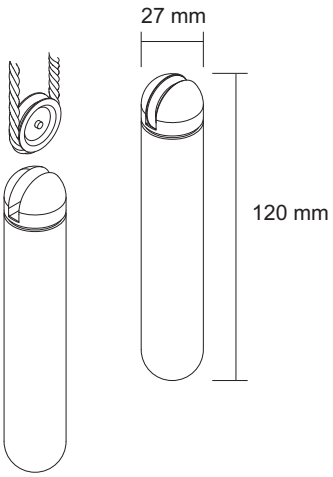

Weight of cord in plastic


Colours white  
grey

On-site installation

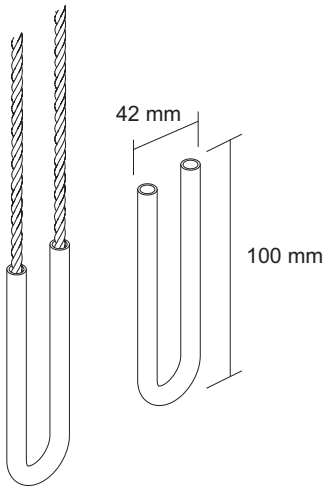

Weight of chain In stainless steel  
INOX 90 Weight 90 g

Factory-made installation




SAFETY I Cord tensioner for child safety, keep  
cord out of the reach of children





# FUNCTIONS

## Variably






## Individually movable







Please find in the following some illustrations of possible sliding element arrangements as well as package forming possibilities.

The fixed sliding element is situated in the front barrel and is fully visible. Overlap of panel approx. 5 cm

## Whirling rod



## Connected movable



Please sketch the arrangement of the sliding elements on your order form. VIEW FROM THE TOP.

The following functions can be noted on the sketch:


\_\_\_\_\_ Sliding elements variably movable

\_\_\_\_\_ X Sliding element with whirling rod



\_\_\_\_\_ Connected sliding rod

\_\_\_\_\_ Sliding element stopped with position fixing element

## Draw cord / Power 24 V



## Connected movable



An example of the calculation of the length of the sliding elements:


$$\frac{\text{System width} \cdot 5,0 \text{ cm}}{\text{Number of sliding elements}} + 5 \text{ cm}$$



# MEASURING AND INSTALLATION

Installation in the groove


Space requirements in the case of installation with tension jacks in a groove:

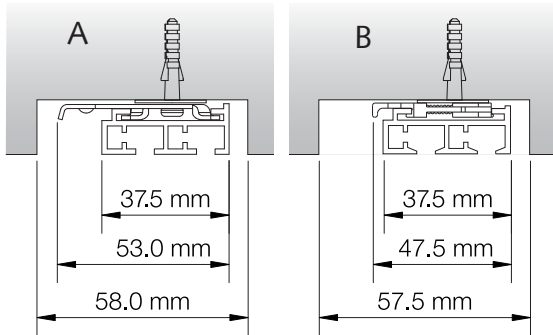

PANTRIC 2

A Tension jack


B Clip

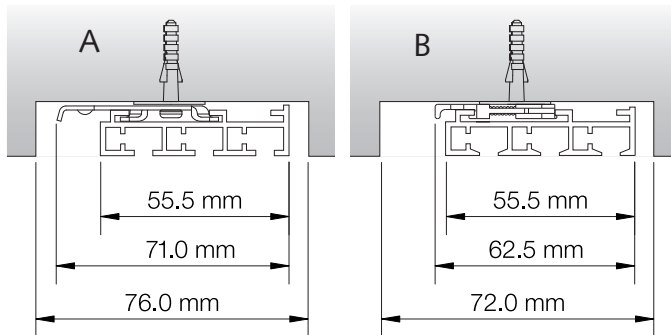

PANTRIC 3

A Tension jack


B Clip

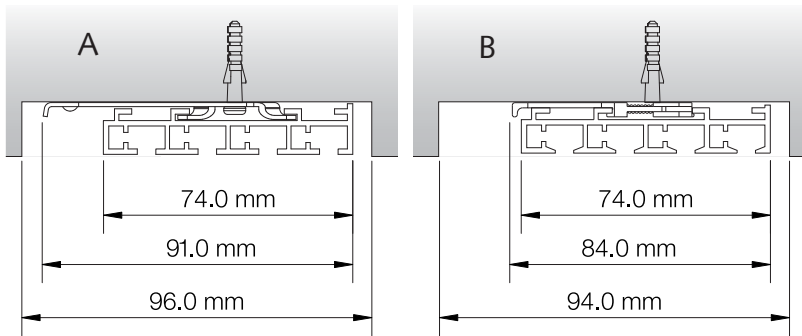

PANTRIC 4

A Tension jack

B Clip

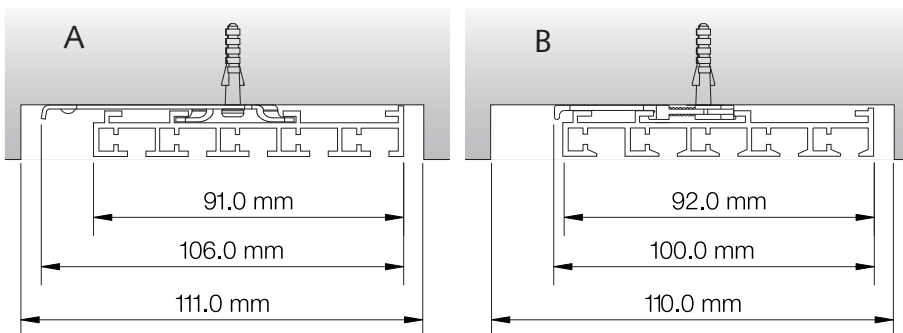


PANTRIC 5

A Tension jack

B Clip

# MEASURING AND INSTALLATION

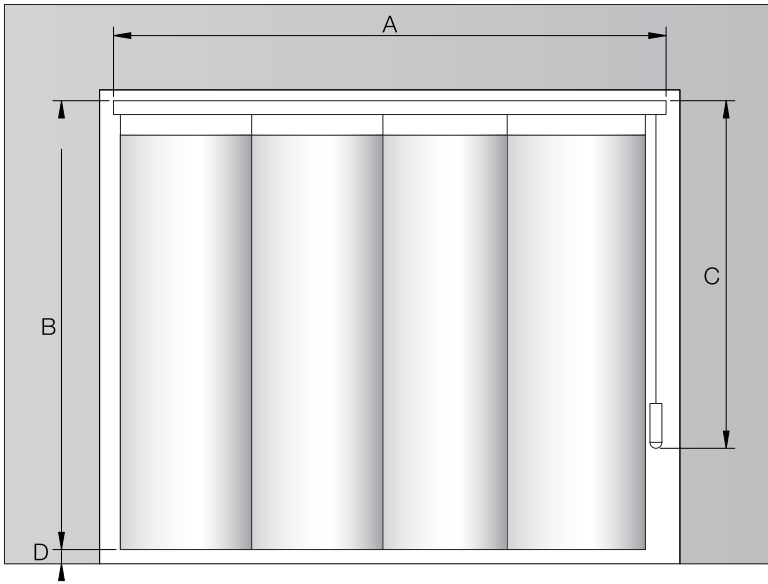


## Measuring

The panel track systems are customized. System widths of up to approx. 600 cm (max.) and system heights of up to approx. 300 cm (max.) are possible.


Larger widths / heights upon inquiry.

- A System width: The width of the panel track systems
- B System height: From the upper edge of the track to the lower edge of the fabric panels
- C Please indicate the drawing side and length of the draw cord
- D Distance to floor

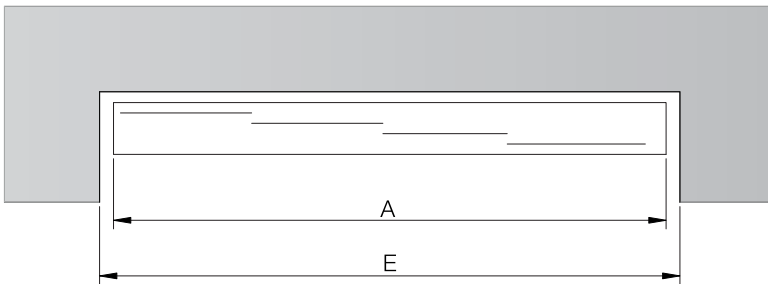

In the case of window niches or wall-to-wall installations, deduct approx. 1 cm from the niche, that is to say from the wall-to-wall measurements.

- E Width of niche
- A System width = niche width, minus 1 cm

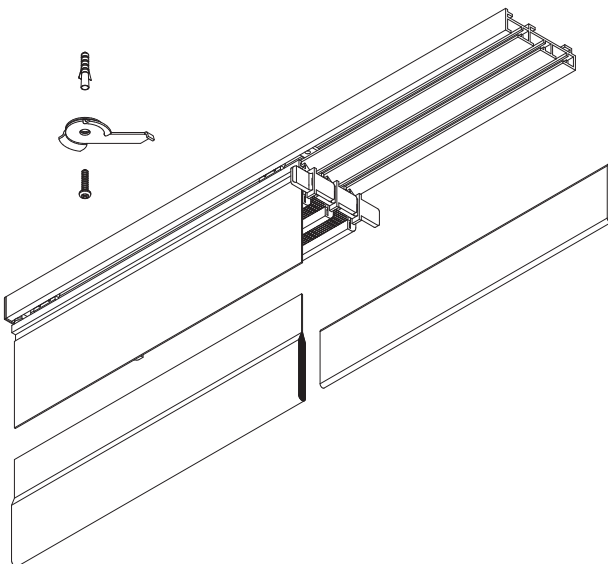

## Installation

- Higher track side in room direction
- Position a tension jack at 5 cm from each track end as well as every 50 cm
- Position the tension jack arm in window direction
- Position the weighting in the lower hollow space of the fabric panels
- Fix the fabric panel with Velcro to the sliding element







Our comprehensive range and a complete list of our global sales outlets can be found at [www.creationbaumann.com](http://www.creationbaumann.com).

05/2013

Création Baumann AG  
Bern-Zürich-Strasse 23 | CH-4901 Langenthal  
Telephone +41 (0)62 919 62 62 | Fax +41 (0)62 922 45 47  
[mail@creationbaumann.com](mailto:mail@creationbaumann.com) | [www.creationbaumann.com](http://www.creationbaumann.com)

*Création* **baumann**